

ULTRA LED™ Spiral Vintage Lamps



Key Features & Benefits

- Classic vintage design with a beautiful amber finish create a sense of elegance and are ideal for exposed bulb applications
- Spiral filament design and warm CCT generate a unique and intimate lighting experience
- Full glass design
- Long life: up to 15,000 hours (L₇₀)
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Suitable for damp locations
- No warm-up time, instant-on with full light output and stable color



SYLVANIA ULTRA LED Spiral Vintage lamps feature a full-glass design and an exposed, spiral filament that deliver a look and feel that is reminiscent of classic incandescent bulbs. These vintage lamps emit a warm, unique glow to create an inviting ambiance in any room, making them ideal for exposed bulb applications such as chandeliers and pendants.

The ULTRA LED Spiral Vintage lamps offer energy efficiency, longer life, and optimal illumination compared to their traditional counterparts, making them smart choices for any residential or commercial applications.

Product Offering

Ordering Abbreviation	Wattage	Color Temperature	Typical Lumens
LEDA19	4.5	2175K	250
LEDST19	4.5	2175K	250
LEDG25	4.5	2175K	250
LEDB10	3	2175K	125

Application Information

Applications

- Chandelier
- Pendant fixtures
- Wall sconces

Market Segments

- Hospitality
- Residential
- Retail

Application Notes

1. Operating temperature range between -20°C and +40°C (-4°F and + 104°F)
2. Not for use with emergency light fixtures or exit lights.
3. Suitable for damp locations – not for use where directly exposed to water.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see www.sylvania.com/fcc15b.



Specification Data

Catalog #	Type
Project	
Comments	
Prepared by	

Ordering Information


Item Number	Ordering Abbreviation	Wattage (W)	Lumens	Base	Input Voltage (V)	CCT	CRI	Average Rated Life (hrs)
40501	LED4.5A19DIM822SPIRALBL	4.5	250	Medium	120	2175K	80	15,000
40502	LED3B10BENTDIM822SPIRALBL	3	125	Medium	120	2175K	80	15,000
40503	LED3B10CBENTDIM822SPIRALBL	3	125	Candelabra	120	2175K	80	15,000
40504	LED4.5G25DIM822SPIRALRP	4.5	250	Medium	120	2175K	80	15,000
40505	LED4.5ST19DIM822SPIRALBL	4.5	250	Medium	120	2175K	80	15,000

Ordering Guide

LED	4.5	A19	/	DIM	/	8	22	/	SPIRAL	/	BL
LED Lamps	Wattage: 4.5	Lamp Type: A19		Dimmable		CRI 8 = 80+	CCT 22 = 2175K		Spiral Filament		Bliaster Packaging

Lamp Dimensions

	(A) MOL (inches)	(B) Diameter (inches)
A19	4.13	2.36
B10 E26	4.21	1.37
B10 E12	4.25	1.37
G25	4.56	3.14
ST19	5.51	2.51

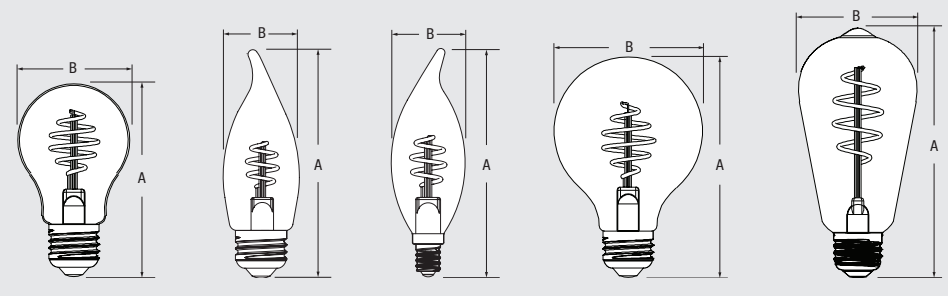

The diagram illustrates the physical dimensions of five different light bulb models. Each bulb is shown with a vertical dimension line labeled 'A' representing the height and a horizontal dimension line labeled 'B' representing the diameter at the widest part of the bulb. The models shown are: A19 (standard A19), B10 E26 Bent (B10 E26 bent), B10 E12 Bent (B10 E12 bent), G25 (G25), and ST19 (ST19).

LEDVANCE LLC
 200 Ballardvale Street
 Wilmington, MA 01887 USA
 Phone 1-800-LIGHTBULB (1-800-544-4828)
www.sylvania.com

SYLVANIA and LEDVANCE are registered trademarks.
 All other trademarks are those of their respective owners.
 Licensee of product trademark SYLVANIA in general lighting.
 Specifications subject to change without notice.

[/sylvania](https://twitter.com/sylvania) [/sylvania](https://facebook.com/sylvania)

