

QUICKTRONIC® T8 Instant Start

UNV High Ambient Temp. Systems
High Efficiency Series



Lamp Striation Control
High Ballast Factor

QHE T8 ISH HT

Lamp / Ballast Guide

32W T8 - OCTRON® lamps

1-lamp QHE1x32T8/UNV ISH-HT-SC

2-lamp QHE2x32T8/UNV ISH-HT-SC

3-lamp QHE3x32T8/UNV ISH-HT-SC

Also operates:

FB032, FB031, F030/SS (30W), FB030/SS (30W), FB029/SS (29W), F028/SS (28W) & F025/SS (25W)

Key System Features

- High Efficiency Systems over 90% efficient
- 90°C maximum case temp.
- Lamp Striation Control (LSC)
- Over 100 LPW (lumens/watt) with OCTRON SUPERSAVER® lamps
- Lowest power T8 PLUS Systems
- Universal voltage (120-277V)
- 1.18-1.20 ballast factor
- 30-50% Energy savings
- Min. Starting Temp:
 - -20°F (-29°C) for T8 lamps
 - 60°F (16°C) for Energy Saving T8 lamps
- <10% THD
- Virtually eliminates lamp flicker
- RoHS compliant
- Lead-free solder and manufacturing process

Application Information

QUICKTRONIC High Efficiency ballasts

are ideally suited for:

- Any applications where the highest light output for the lowest amount of power T8 systems are needed for maximum energy savings
- High bay lighting
- Energy Retrofits
- Commercial & Retail
- Hospitality & Institutional
- New Construction

OSRAM QUICKTRONIC High Efficiency (QHE) energy-saving electronic T8 ISH (PLUS) ballasts offer several advantages:

- Same Light, Less Power!
- Up to 6% in energy savings compared to standard T8 low power electronic ballasts without compromising light output
- Maximum energy savings when compared to F40T12 magnetically ballasted systems
- High Light Output:
 - Higher lumens per fixture
 - Fewer fixtures required for same light output
- Parallel Circuitry: keeps remaining lamps lit if one or more go out.
- Lamp Striation Control (LSC): T8 energy saving lamps should be operated above 60°F, but under certain conditions the lamps may striate. LSC circuitry may minimize or eliminate this condition; however there are limited applications where LSC circuitry may not entirely mitigate lamp striations. These ballasts are also RoHS compliant and feature lead-free solder and manufacturing process.

System Information

QUICKTRONIC High Efficiency (QHE)

System advantages:


- Operate from 120V through 277V
 - Eliminates "wrong voltage" errors
 - Reduces inventory by 50%
- Utilizes Instant Start operation for
 - Highest System Efficacy
 - Low temperature starting capability
- Very low harmonic distortion (<10%)THD
- Operate at >42 kHz to reduce potential interference with infrared control systems



- High Ambient Temp: specifically designed for those applications where the ballast is subject to higher ambient temperatures, such as high bays in industrial installations.

QUICKTRONIC High Efficiency (QHE) systems are covered by the QUICK 60 +® warranty, the first and most comprehensive lamp & ballast system warranty in the industry.

System Type	Input Power (W)	Initial System Lumens	System Efficacy LPW	Mean System Lumens	Relative Mean Light Output	Energy Savings
4:F34T12 - Two E.S. Magnetic Ballasts	144	9330	65	7930	Baseline	Baseline
4:F032T8/700 - QTP4x32T8/UNV-ISH-SC	112	9150	82	8415	106%	22%
3:F032/XP® - QHE3x32T8/UNV-ISH-HT-SC	111/109	10620	96/97	9985	126%	23%
3:F028/SS - QHE3x32T8/UNV-ISH-HT-SC	98/96	9650	98/101	9070	114%	32%
2:F032/XP - QHE2x32T8/UNV-ISH-HT-SC	74/73	7200	97/99	6770	85%	49%
2:F028/SS - QHE2x32T8/UNV-ISH-HT-SC	65/64	6540	101/102	6150	78%	55%

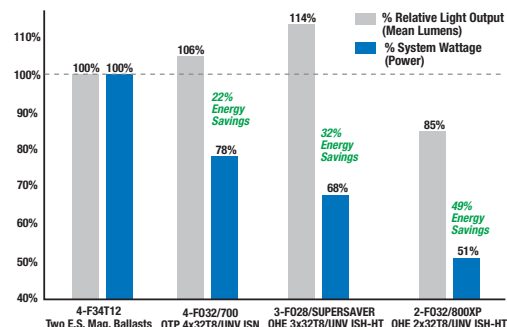

SPECIFICATION DATA

Catalog #	Date	Type
Project	Prepared by	
Comments		

High Efficiency, Lamp Striation Control, High Ambient (120-277V)




Item Number	Description	Input Current (AMPS)	Lamp Type	Rated Lumens (lm)	No. of Lamps	Ballast Factor (BF)	System Lumens	Mean Lumens	Input Power (W)	System Efficacy (lm/W)	BEF ¹
49496 49495	QHE1X32T8/UNV ISH-HT-SC Banded Pack 10-Pack	0.32/0.14	F032/700	2600	1	1.20	3120	2870	38	82	3.16
		0.32/0.14	F032/XP [®]	3000	1	1.20	3600	3385	38	95	3.16
		0.30/0.13	F030SS	2850	1	1.20	3420	3215	36	95	3.33
		0.27/0.12	F028SS	2725	1	1.20	3270	3075	33	99	3.64
		0.26/0.12	F025/SS	2475	1	1.20	2970	2790	30	99	4.00
49498 49497	QHE2X32T8/UNV ISH-HT-SC Banded Pack 10-Pack	0.65/0.28	F032/700	2600	2	1.20	6240	5735	74/73	84/86	1.64
		0.65/0.28	F032/XP	3000	2	1.20	7200	6770	74/73	97/99	1.64
		0.59/0.25	F030SS	2850	2	1.20	6840	6430	70/69	98/99	1.74
		0.55/0.23	F028SS	2725	2	1.20	6540	6150	65/64	101/102	1.88
		0.50/0.22	F025/SS	2475	2	1.20	5940	5585	58/57	102/104	2.11
49500 49499	QHE3X32T8/UNV ISH-HT-SC Banded Pack 10-Pack	0.93/0.40	F032/700	2600	3	1.18	9205	8460	111/109	83/84	1.08
		0.93/0.40	F032/XP	3000	3	1.18	10,620	9985	111/109	96/97	1.08
		0.87/0.38	F030SS	2850	3	1.18	10,090	9485	104/103	97/98	1.15
		0.82/0.35	F028SS	2725	3	1.18	9650	9070	98/96	98/101	1.23
		0.72/0.31	F025/SS	2475	3	1.18	8760	8235	87/86	101/102	1.37


Banded Pack Item Numbers, (add "-B" to Description). Banded Pack and 10-Pack contain 10 pieces each.

¹ Ballast Efficiency Factor (BEF) shown = (Ballast Factor x 100) divided by Input Power (Note: calculation based on lowest wattage value).


Preliminary specifications. Please contact OSRAM for additional information.



QUICKTRONIC 1x32



QUICKTRONIC 2x32



QUICKTRONIC 3x32

Dimensions "-SC" Small Enclosure:

Overall: 9.5" L x 1.68" W x 1.18" H


Mounting: 8.90"

Product Weight:

1.6 lbs each (approx.)

Wiring:

Leads only

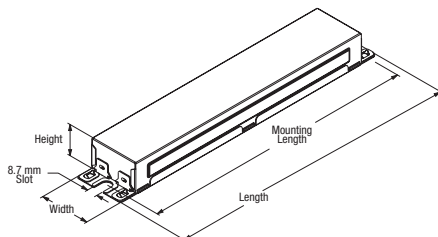

Item Number	49500 QHE 3 x 32T8 / UNV ISH - HT - SC	Case Size
QUICKTRONIC High Efficiency		High Case Temp. Rating
Number of Lamps		Starting/Ballast Factor
Primary Lamp Wattage		Line Voltage (120-277V)

High Ballast Factor

T8 Instant Start

High Efficiency

Performance Guide

Data based upon OCTRON[®] lamps shown. QUICKTRONIC[®] QHE Instant Start ballasts are also compatible with other lamp manufacturers equivalent lamp types that meet ANSI specifications.

QHE Instant Start ballasts will operate F32 (and the SUPERSAVER[®] & U-Bend equiv-alent) T8 lamps.

Specifications

Data based on F32T8

Starting Method: Instant Start

Ballast Factor: 1.18-1.20

Circuit Type: Parallel

Lamp Frequency: >42 kHz

Lamp CCF: Less than 1.7

Starting Temp:²

-20°F (-29°C) for OCTRON T8 lamps; 60°F

(16°C) for SUPERSAVER[®] T8 lamps Input

Frequency: 50/60 Hz

Low THD: <10%

Power Factor: >98%

Voltage Range: ±10% of 120-277V rated line (108-305V)

UL Listed Class P, Type 1 Outdoor

CSA Certified

High Ambient Applications:

90°C Max. Case Temp. (3 yr. warranty)

Standard Ambient Applications:

70°C Max. Case Temp. (5 yr. warranty)

FCC 47CFR Part 18 Non-Consumer

Class A Sound Rating

RoHS Compliant³

ANSI C62.41 Cat. A Transient Protection

GFCI compatible

Emergency ballast compatible

Remote Mounting (Max. wire length from

ballast case to lampholder):

- 20 ft: full wattage T8s
- 10 ft: energy saving T8s
- 4 ft: 25W energy saving T8s

² Operation below 50°F (10°C) may affect light output or lamp operation – see "Low Temp. Starting" definition.

³ Complies with European Union Restriction of Hazardous Substances Directive (Directive EC 2002/95)

System Life / Warranty

QUICKTRONIC products are covered by the QUICK 60+[®] warranty, a comprehensive lamp and ballast system warranty. For additional details, refer to the QUICK 60+ warranty bulletin.

Products distributed by
LEDVANCE LLC

For Customer Service contact
1-800-LIGHTBULB

Specifications subject to change without notice.

SYLVANIA, QUICK 60+, QUICKSENSE, PROstart, POWERSENSE, and QUICKSTEP are registered trademarks of OSRAM SYLVANIA Inc. QUICK 7XL and QUICK 7XL+ are trademarks of OSRAM SYLVANIA Inc. OSRAM and QUICKTRONIC are registered trademarks of OSRAM GmbH. OCTRON, SUPERSAVER, XP, XPS, PENTRON, and ECOLOGIC are registered trademarks of LEDVANCE LLC. DULUX is a registered trademark of LEDVANCE GmbH. All other trademarks are those of their respective owners. Specifications subject to change without notice. © 2018 OSRAM SYLVANIA Inc. All rights reserved.

OSRAM

QHE T8 ISH HT